


JET TENDER® 16 Seats Back

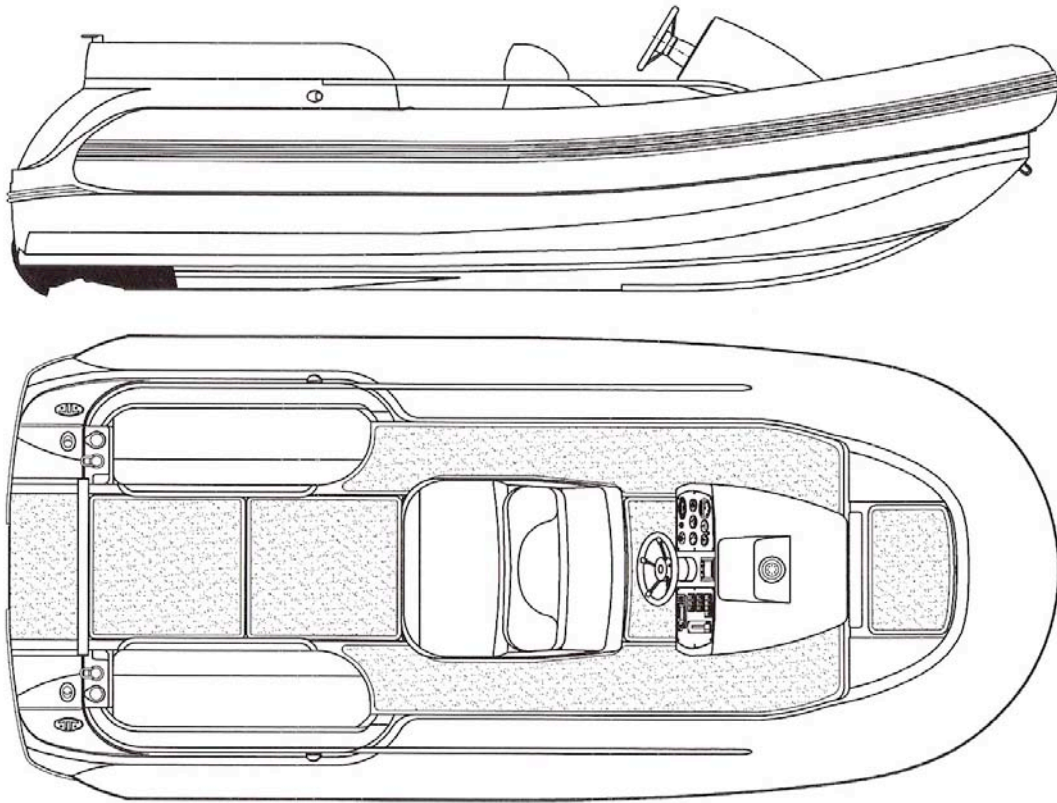

DIMENSIONS

Length o.a.:	5,02 m.
Beam max.:	2,21 m.
Height max.:	1,17 m.
Height max. for storage (with folded console and tube's front air chamber deflated):	1,00 m.
Diameter inflatable tubes (at stern):	0,40 m.
Independent tube's compartments:	No. 5
Seat placements:	No. 8
Passengers capability (C.E. directive):	No. 8
Design category (C.E. directive):	C

STANDARD EQUIPMENT

Engine: Yanmar marine diesel engine type *4BY-150* developing 150 HP @ 4.000 rpm, 4L cylinders, 1.995 cc displacement, equipped with common rail direct fuel injection, twin circuit cooling system and stainless steel marinemounts.

Drive: Waterjet unit Castoldi type *Jet 05* equipped with stainless steel impeller, integrated gearbox, mechanical disconnecting clutch, movable debris screen grid on water intake, all oil lubricated bearings - Kit for fresh water cooling the engine's raw water circuit.

Matching system: Flexible coupling - C.V. joint - Shaft protection.

Controls: Sea Star hydraulic steering system with stainless steel steering wheel - Single lever box for engine's throttle control with integrated switch for electric/hydraulic reversing deflector control - Knob for the control of the mechanical disconnecting clutch - Handle for the control of the debris screen grid.

Electrical: Sets of 12 V free maintenance, hermetic batteries with temporary parallel switch - Two main switches - Charge splitter/selector - Navigation lights (flush mounted LED red and green lights + removable pole mounted 360° white light) - Led courtesy deck lights - 12V accessory socket - Electric horn - Automatic electric bilge pumps - All electrical system fitted with fuses and circuit breakers - All sealed electrical connections - Console folding electric system with No. 2 rams.

Dashboard with instruments: Starting key - Engine’s instruments - Watertight switches - Reversing deflector position gauge - Safety engine stop - Fuel level gauge - Engine’s room water detector

Lifting and towing: No. 4 folding stainless steel lifting eyes - No. 2 pull-up stainless steel cleats - No. 1 bow center rubber cleat - No. 3 towing eyes (1 bow, 2 transom) - Ski pole (removable).

Fuel system: Under-deck stainless steel fuel tank, 104 lts capacity with on-deck fill and vent - Fuel shut-off solenoid valve - Racor fuel-water separator filter.

Exhaust system: Stainless steel pipe with integrated muffler.

Seating: No. 2 side/stern 3 place cushioned benches - No. 1 two place center cushioned bench (on engine hatch) - helmsman seat (on engine hatch). *All cushions and backrests in white leather-like upholstery with inspectionable encapsulated soft foam.*

General: Transom platform with integrated No. 4 steps telescopic stainless steel ladder - Stainless steel handrails - Bow and stern grab rails - Keel protection (replaceable) - Waterproof console cover - Engine room air intakes - Kit for tubes’ emergency repair - Air pump, manual - Fire extinguisher - Manual bilge pump - Pair of paddles - Owner manual - Engine’s hatch (ram assisted lifting) - Engine room’s acoustic and thermal insulation - Under seats storage lockers.

Standard colours: White tubes - light grey, navy blue or black fender on tube - white hull, console, deck, engine hatch - white cushions - white rain/spray dodger, boat cover.

Boat is delivered protected by fabric cover and positioned on wooden cradle

OPTIONAL EQUIPMENT

Canvas

- Bimini top transom
- Bimini top transom with weather curtain set (full enclosure, limo kit)
- Boat cover.....
- BO.FO.R.D (bow folding removable dodger, + 35 cm height).....

Colours, Writings and Materials

- Custom hull colour
- Custom deck colour.....
- Custom tube colour, single or bi-colour.....
- Custom upholstery colour
- Custom rain/spray dodger colours.....
- No. 2 writings “TENDER TO....” made on Hypalon-Neoprene coated fabric vulcanized on both sides with customized graphics.....
- Upholstery and canvas in Sunbrella fabric with requested colour

Interior

- Aft cushioned sections for sunpad layout.....
- Customized lifting eyes
- Dive tank holder
- Recessed single point lifting eye
- Rod holders.....

Teak

- Teak decking (8 mm, solid, including transom platform and fore cockpit, Kg 27)

Navigation - Electronics - Lights

- Batteries’ charger with A.C. stainless steel power inlet
- Compass with light
- Depthsounder/Fishfinder Garmin ”ECHO 300 C”
- GPS Map/Depthsounder Garmin “521 S”
- Inflator/Deflator (portable) 12 V flow rate 1000 l/min
- No. 2 underwater transom lights (LED)
- Portable watertight search light
- Stereo package Aquatic AV - AQIP3B including:
 - Radio/iPod/MP3 player (with external socket), completely sealed and watertight
 - Integrated iPod control and interface
 - AM/FM/XM stereo receiver antenna
 - No. 4 watertight speakers
- VHF, waterproof, class D, DSC,
with all U.S. and International frequencies ; with aerial

Safety

- Anchor, Danforth type, Kg, 4, made of polished stainless steel,
with chain 2,00 m long and rope 15,00 m. long
- Kit of engine’s spare parts
- Kit of waterjet unit’s spare parts
- Rescue boat package (to comply with MCA rules) for yachts under 500 GT *
- Satellite tender tracking system (internet accessible)

General

- Antiskid stripes on tube’s walking area
- Deck shower with pressurized fresh water
system and 55 lt. water tank (Kg. 7,6)
- Inflatable tube (as spare) complete with fender and valves
- Lashings loads’ eyes
- Mooring whips eyes
- No. 2 bow/side towing eyes
- Portable fridge (with power pack)

* Portable watertight search light must be ordered too for completing the rescue boat package