


## JET TENDER® 16

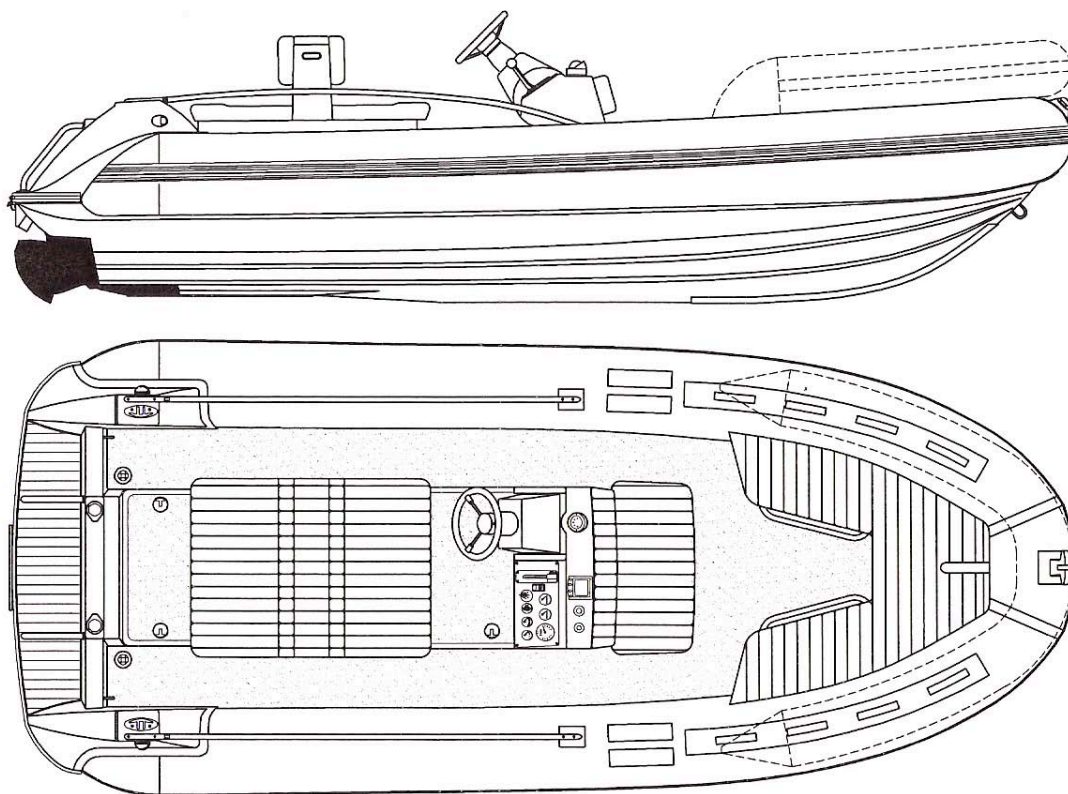

### ***DIMENSIONS***

|   |         |
|---|---------|
| Length o.a.: .....                            | 5,00 m. |
| Beam max.: .....                              | 2,17 m. |
| Height max. (with folded console): .....      | 1,00 m. |
| Diameter inflatable tubes (at stern): .....   | 0,40 m. |
| Independent tube's compartments: .....        | No. 5   |
| Seat placements: .....                        | No. 7   |
| Passengers capability (C.E. directive): ..... | No. 7   |
| Design category (C.E. directive): .....       | C       |

### ***STANDARD EQUIPMENT***

**Engine:** Yanmar marine diesel engine type *4JH4-HTE* developing 110 HP @ 3.200 rpm, 4L cylinders, 2.190 cc displacement, equipped with twin circuit cooling system and stainless steel marinemounts.

**Drive:** Waterjet unit Castoldi type *Jet 05* equipped with Durethan impeller, integrated gearbox, mechanical disconnecting clutch, movable debris screen grid on water intake, all oil lubricated bearings - Kit for fresh water cooling the engine's raw water circuit.

**Matching system:** Flexible coupling - Direct coupling.

**Controls:** Sea Star hydraulic steering system with stainless steel steering wheel - Single lever box for engine's throttle control with integrated switch for electric/hydraulic reversing deflector control - Knob for the control of the mechanical disconnecting clutch - Handle for the control of the debris screen grid.

**Electrical:** 12 V free maintenance, hermetic battery - One main switch - Navigation lights (flush mounted LED red and green lights + removable pole mounted 360° white light) - Led courtesy deck lights - 12V accessory socket - Electric horn - Automatic electric bilge pumps - All electrical system fitted with fuses and circuit breakers - All sealed electrical connections - Console folding electric system with No. 1 ram.

Dashboard with instruments: Starting key - Engine’s instruments - Watertight switches - Reversing deflector position gauge - Safety engine stop - Fuel level gauge

Lifting and towing: No. 4 folding stainless steel lifting eyes - No. 2 pull-up stainless steel cleats - No. 3 towing eyes (1 bow, 2 transom) - Ski tow.

Fuel system: Under-deck stainless steel fuel tank, 108 lts capacity with on-deck fill and vent - Fuel shut-off solenoid valve - Racor fuel-water separator filter.

Exhaust system: Stainless steel pipe with integrated muffler.

Seating: No. 4 seats on two opposite benches with removable back (with storage) on engine hatch - No. 2 seats on console bench - No. 4 seats on fore benches. *All cushions and backrests in white leather-like upholstery with inspectionable encapsulated soft foam.*

General: Transom platform teak laid - Stainless steel telescopic ladder with No. 3 teak steps - Stainless steel handrails - Bow and stern grab rails - Keel protection (replaceable) - Waterproof console cover - Engine room air intakes - Kit for tubes’ emergency repair - Air pump, manual - Fire extinguisher - Manual bilge pump - Pair of paddles - Owner manual - Engine’s hatch (ram assisted lifting) - Engine room’s acoustic and thermal insulation - Under seats storage lockers.

Standard colours: White tubes - light grey, navy blue or black fender on tube - white hull, console, deck, engine hatch - white cushions - white rain/spray dodger, boat cover.

Boat is delivered protected by fabric cover and positioned on wooden cradle

---

**OPTIONAL EQUIPMENT**

**Canvas**

- Bimini top transom .....
- Boat cover.....
- Spray dodger.....

**Colours, Writings and Matherials**

- Custom hull colour .....
- Custom deck colour.....
- Custom tube colour, single or bi-colour .....
- Custom upholstery colour .....
- Custom rain/spray dodger colours.....
- No. 2 writings “**TENDER TO....**” made on Hypalon-Neoprene coated fabric vulcanized on both sides with customized graphics.....
- Upholstery and canvas in Sunbrella fabric with requested colour .....

**Interior**

- Bow cushioned section for sunpad layout.....
- Customized lifting eyes .....
- Dive tank holder .....
- Rod holders.....
- Single point lifting eye .....

**Teak**

- Teak decking (8 mm, solid).....

**Navigation - Electronics - Lights**

- Batteries’ charger with A.C. stainless steel power inlet .....
- Compass with light .....
- Depthsounder/Fishfinder Garmin ”ECHO 300 C” .....
- GPS Map/Depthsounder Garmin “521 S” .....
- Inflator/Deflator (portable) 12 V flow rate 1000 l/min .....
- No. 2 underwater transom lights (LED) .....
- Portable watertight search light .....
- MP3/Ipod socket with holder, amplifier and N. 2 speakers .....
- Second independent battery for services with temporarily parallel switch  
for engine starting and charger/splitter selector (necessary in case of electric optionals).....
- VHF, waterproof, class D, DSC,  
with all U.S. and International frequencies ; with aerial .....

**Safety**

- Anchor, Danforth type, Kg, 6, made of polished stainless steel,  
with chain 2,00 m long and rope 15,00 m. long .....
- Boarding handle .....
- Bow stainless steel pulpit (removable).....
- Extension in height of transom platform grab rails .....
- Kit of engine’s spare parts .....
- Kit of waterjet unit’s spare parts .....
- Rescue boat package (to comply with MCA rules) for yachts under 500 GT \* .....
- Satellite tender tracking system (internet accessible) .....

**General**

- Antiskid stripes on tube’s walking area .....
- B.I.S.S. (bow inflatable spray shield) increases bow’s height of 27 cm .....
- Deck shower with pressurized fresh water  
system and 55 lt. water tank (Kg. 7,6) .....
- Mooring whips eyes .....
- No. 2 bow/side towing eyes .....
- Portable fridge (with power pack).....
- Removable windscreen.....

\* Portable watertight search light must be ordered too for completing the rescue boat package